

ASPK600


6W 220-240V AC IP65 Carbon Black
COB LED Garden Wall/Spike Light

Excalibur²



PRODUCT FEATURES

- Metal Gland Pre-Wired To 2.5m Of Toughened Rubber Cable
- Aluminium Body Featuring Anti-Glare Cowl
- IP65 Rated
- DiamondTec Halogen Styled Lens
- Interchangeable Coloured Glass Filters Available (Sold Separately)
- Detachable Spike for Surface Mounting
- Carbon Black Powder Coated Finish

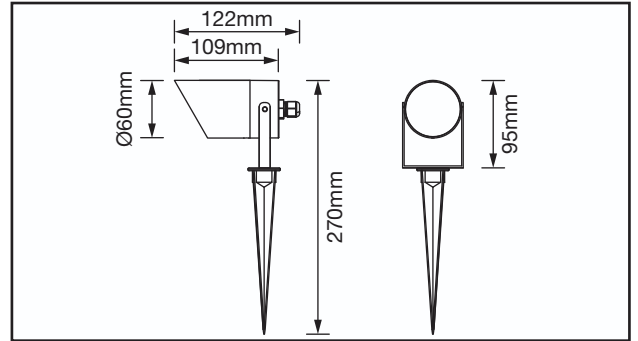

TECHNICAL SPECIFICATIONS

| Product Code | ASPK600/30 | ASPK600/40 |
|------------------------------------|--------------|--------------|
| Luminous Flux (LM) | ≤550lm | ≤600lm |
| Useful Luminous Flux (LM) | ≤550lm | ≤600lm |
| CCT (Kelvin) | 3000K | 4000K |
| Beam Angle (°) | 20 | 20 |
| SDCM | <6 | <6 |
| CRI | >80 | >80 |
| Peak Intensity (cd) | 3418 | 3075 |
| Operating Voltage (V) | 220-240V AC | 220-240V AC |
| Max Output Power (W) | 6W | 6W |
| Operating Current (A max) | 0.035A | 0.035A |
| Standby Power (W) | <0W | <0W |
| Power Factor (Pf) | >0.7 | >0.7 |
| Class | I | I |
| Body Material | Aluminium | Aluminium |
| Frame Colour | Carbon Black | Carbon Black |
| Switching Cycles | 15,000 | 15,000 |
| Ingress Protection | IP65 | IP65 |
| Ambient Operating Temperature (°C) | -20°C~40°C | -20°C~40°C |
| Input Frequency (Hz) | 50/60Hz | 50/60Hz |
| Guarantee | 3 Years | 3 Years |
| Dimmable | No | No |
| Cable Length | 2.5m | 2.5m |
| Lifetime (L70 B50) | 25,000 Hrs | 25,000 Hrs |

