


NEW FROM SOLAX

X1-HYBRID G4



X1-Hybrid G4

3.0kW/3.7kW/5.0kW
6.0kW/7.5kW

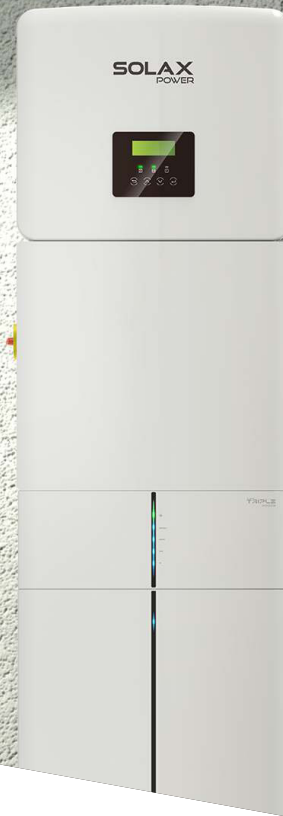

Features



Support 150% oversized PV power

Excess energy to battery



Fast charging and high power discharge

Max 30A charging & discharge current



Remote units control & upgrading function

External control communication interface



Working under extremely cold condition

Working in full load under extreme cold temp $-35^{\circ}\text{C}/-31^{\circ}\text{F}$



On & Off grid parallel use

Inverter on&off grid parallel to support higher power loads



Unbalanced output supported

Prevent voltage imbalance when using high-power electrical appliances

info@solaxpower.com
service@solaxpower.com



For More Informations Contact Us

www.solaxpower.com
AU: +61 1300 476529
DE: +49 6142 4091664

Global: +86 571-56260008
UK: +44 2476 586998
NL: +31 (0) 852 737932



X1-HYBRID G4 (SINGLE PHASE)

X1-Hybrid-3.0-D	X1-Hybrid-3.7-D	X1-Hybrid-5.0-D	X1-Hybrid-6.0-D	X1-Hybrid-7.5-D
X1-Hybrid-3.0-M	X1-Hybrid-3.7-M	X1-Hybrid-5.0-M	X1-Hybrid-6.0-M	X1-Hybrid-7.5-M

INPUT (DC)					
Max. PV array power [Wp]	4500	5500	7500	9000	10000
Max. DC voltage [V]			600		
Nominal DC operating voltage [V]			360		
Max. input current (input A/input B) [A]			14/14		
Max. short circuit current (input A/input B) [A]			16/16		
MPPT voltage range[V]			70-550		
Start operating voltage[V]			90		
No. of MPP trackers/Strings per MPP tracker			2/1		
INPUT AC					
Max. apparent AC power[VA]	6300	7360	9200	9200	9200
Max. AC current[A]	27.4	32	40	40	40
Nominal grid voltage(AC voltage range)[V]			220/230/240(180-270)		
Nominal grid Frequency/range[Hz]			50/60		
OUTPUT AC					
Nominal AC power [VA]	3000	3680	5000	6000	7500
Max. apparent AC power [VA]	3300	3680	5500(4600for DE 4999for AU)	6600	7500
Nominal grid voltage(AC voltage range) [V]			220/230/240(180-270)		
Nominal grid frequency/range [Hz]			50/60		
Max. AC current [A]	14.4	16	23.9(20 for DE/21.7 for AU)	28.6	32.6
Displacement power factor			0.8 leading...0.8 lagging		
THDi, rated power [%]			<2		
OUTPUT DC (BATTERY)					
Battery type			Li-ion		
Battery voltage range [V]			80-480		
Max.continuous charge/discharge current [A]			30		
Communication interfaces			CAN/RS485		
Reverse connect protection			Yes		
OFF-GRID OUTPUT (WITH BATTERY)					
MAX. continuous apparent power [VA]	3000	3680	5000	6000	7500
Rated voltage[V],Frequency [Hz]			230, 50/60		
MAX.continuous current [A]	13	16	21.7	26.1	32.6
Peak apparent power (rated)[%], Duration[s]	120% rated, 1h	120% rated, 1h	120% rated, 1h	120% rated, 10mins	100% rated
Switching time [ms]			internal switch <10, external switch <100		
THDv, linear Load [%]			<2		
EFFICIENCY					
MPPT efficiency [%]			99.9		
Euro efficiency [%]			97.0		
Max. efficiency [%]			97.6		
Battery charge/discharge efficiency [%]			97.0/97.0		
POWER CONSUMPTION					
Standby consumption [W]			<3		
STANDARD					
Safety			IEC62109-1 / IEC62109-2		
EMC			EN 61000-6-1:2007/EN 61000-6-2:2005/EN 61000-6-3/EN 61000-6-4/EN61000-3-2/EN61000-3-3/EN61000-3-11/EN61000-3-12		
Certification			VDE 0126-1-1 A1:2012 / VDE4105:2018 /G99 /G98 / AS4777 / EN50549/ CEI 0-21 /RD661/RD1699/UNE206007-1/VDE0216/MFR2019		
ENVIRONMENT LIMIT					
Degree of protection(according to IEC60529)			IP65		
Operating temperature range [°C]			-35..... +60°C (derating at +45°C)		
Max. operation altitude [m]			<3000		
Humidity [%]			0~100 (no condensing)		
Storage temperature [°C]			-40..... +70°C		
Typical noise emission [dB]	<30	<30	<30	<30	<45
DIMENSION AND WEIGHT					
Dimensions(WxHxD) [mm]			482*417*181		
Weight[kg]	22	22	22	22	23
Cooling concept	Natural cooling	Natural cooling	Natural cooling	Natural cooling	Forced airflow
Topology			Non-isolated		
Communication interfaces			CT/Meter/External control RS485/Pocket Series(optional)/DRM/USB Upgrade		
LCD display			Yes		
Standard warranty [years]			10		